

WARNING

KEEP THIS MANUAL
After reading this manual, please keep it for later reference.

HANDING
To avoid breakage, do not apply excessive force to the switches or controls.


CARE
If the exterior becomes dirty, wipe it with a clean, dry cloth. Do not use liquid cleaners such as benzene or thinner, or cleaning compounds or flammable polishes.

KEEPING FOREIGN MATTER OUR OF YOUR EQUIPMENT
Never set any container with liquid in near this equipment. If liquid gets into the equipment, it could cause a breakdown, fire, or electrical shock. Be careful not to let metal objects get into the equipment. If something does slip into the equipment, unplug the AC adapter from the wall outlet. Then contact your nearest dealer or the store where the equipment was purchased.

REGARDING DISPOSAL
Do not dispose of this product along with your household trash. By disposing of this product correctly, you can avoid environmental harm or health risk. The correct method of disposal will depend on your locality, so please contact the appropriate local authorities for details.

IMPORTANT NOTICE
This product has been manufactured according to strict specifications and voltage requirements that are applicable in the country in which it is intended that this product should be used. If you have purchased this product via the internet, through mail order, and/or via a telephone sale, you must verify that this product is intended to be used in the country in which you reside.

WARNING: Use of this product in any country other than that for which it is intended could be dangerous and could invalidate the manufacturer's or distributor's warranty. Please also retain your receipt as proof of purchase otherwise your product may be disqualified from the manufacturer's or distributor's warrant.

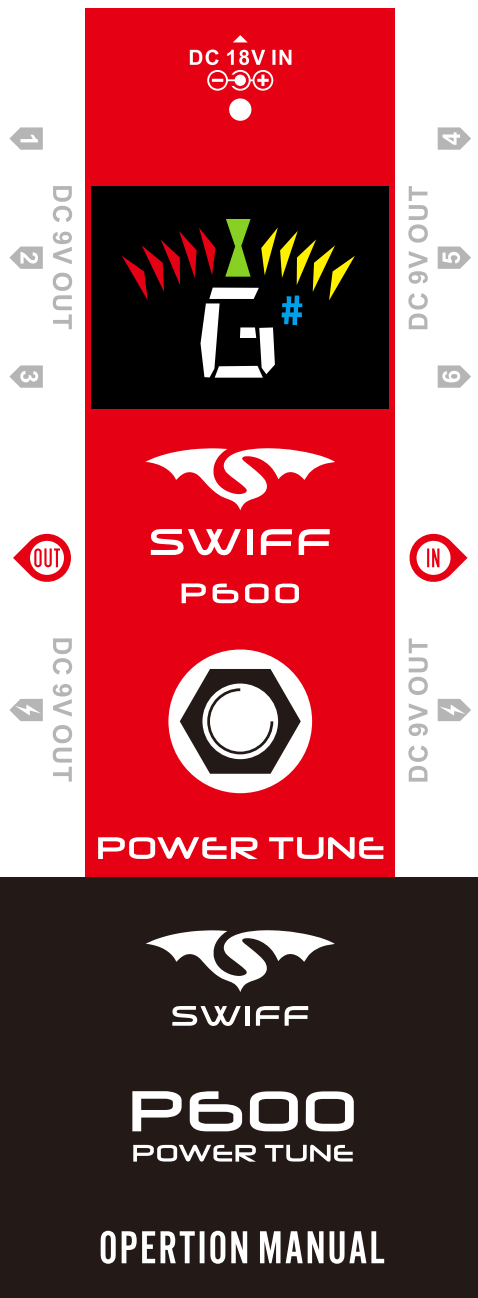

Many thanks for choosing SWIFF® creative product- POWER TUNE P600, please read the instructions in detail


TUNER MODE

The screen of this unit will change color, and the indicator will move, depending on how close the note is to in tune, please see the below chart.





POWER ON/OFF: when switch to tuner mode, the sound of. f

ILLUSTRATION

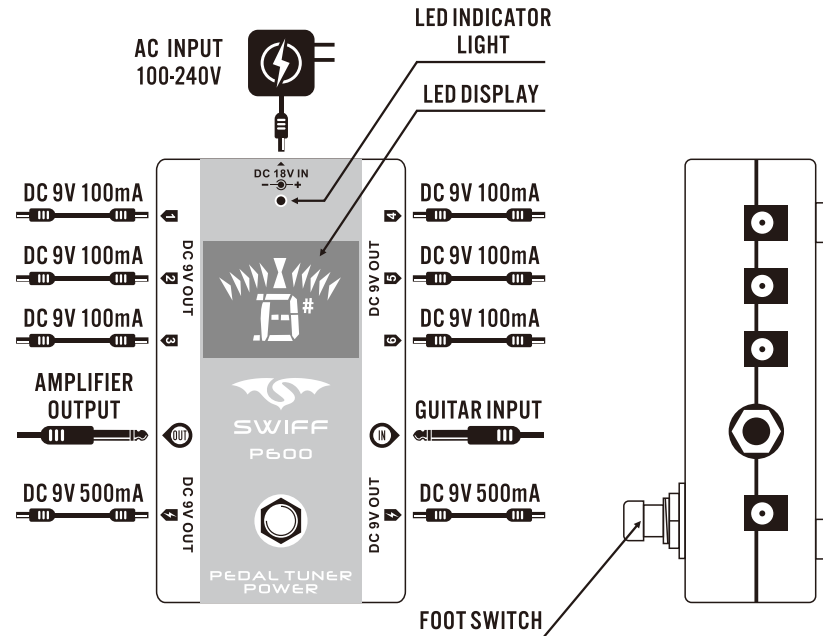

POWER MODE

- DC18V INPUT:** Please plug in the output of power adapter here, and do not use adapter from elsewhere. Using power adapter without our company's tests or certification might cause damages to the host or other devices. On that occasion, the user must bear corresponding responsibility himself.
- OUTPUT 1-6:** All DC9V power output with the maximum volume of 100mA, are suitable for ordinary analog effector. Under the circumstances of all LED lights on, instantaneous over-current in certain output would lead to the corresponding LED light's flash and the currents of this channel limit to 100mA. In other words, output 1-6 might not be able to work properly if the connected digital effector are of larger power consumption, then you need to use output 8.
- OUTPUT 2:** Also DC 9V power output with the maximum volume of 500mA, is suitable for digital effector and DC9V low-power digital guitar amplifiers. When instantaneous over-current occurs in this channel, the corresponding LED light would be flashing and the current limit to 500mA.
- If the input polarity of the electrical device is** , please connect Polarity Reversal Cable to the DC Power Cable. then connect the device, as shown:

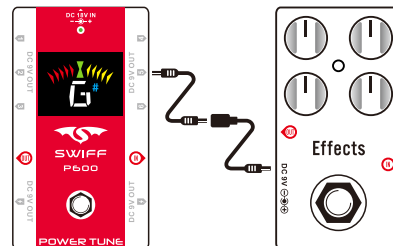

Attention: Incorrect polarity would damage this unit, please make sure correct positive and negative polar before wiring.

SHORT-CIRCUIT PROTECTION

All 8 outputs in this unit have separate short-circuit protection, i.e. short circuit in one channel won't affect other channels' function. When any of channels shorts out, the short-circuited channel and the Green LED light will off, but in the other normal channels are still on. This helps locating the faults when there were short circuits among many effector.

ACCESSORIES

- Host 1pc
- DC 18V Power Adapter 1 pc
- DC Power Cable 8pcs, Polarity Reversal Cable 1pc
- Manual 1pc

SWIFF TECHNOLOGY CO.,LTD.
www.swiffmusic.com

SWIFF TECHNOLOGY CO.,LTD. is committed to guarantee the highest quality standards. All technical Parameters or pictures are only for your information. Subject to the actual products.